

User Manual

for Narpult Smart Lock



Welcome to join Narpult Smart Home, please read this user manual before operating your smart lock, and keep it for further reference.

Powered by **Narpult Smart**

Customer Service:

service01@narpultsmart.com

Operation by APP via Bluetooth

Part 1 Add lock

©Download and install **TTLock** from Google Play or APP Store



Google Play





APP Store

©Register account with phone number or e-mail and login

The screenshot shows the TTLock app's registration interface. At the top, there are navigation options for 'Login' and 'Register' (the latter is highlighted with a red box). Below this, there are two tabs: 'Phone' and 'Email' (the latter is selected). The 'Email' registration path includes fields for 'Enter your Email', 'Password between 6-20 chars', and 'Confirm Password'. A 'Get Code' button is positioned next to the 'Verification Code' field. A large circular graphic with a plus sign is on the right side. At the bottom, there is a 'Register' button and a note: 'The Phone needs to be within 2 meters of the Smart Lock during the Pairing process.'

©Add your lock on APP



Please open Bluetooth setting on your phone before connection, and stay your phone within 2 meters away from your lock.

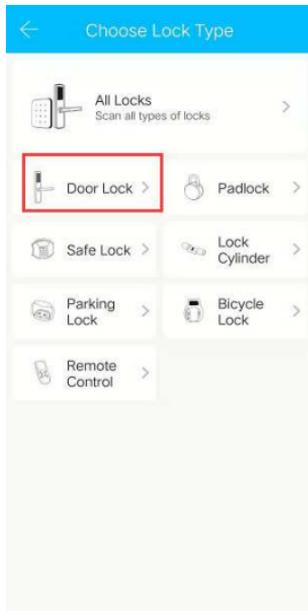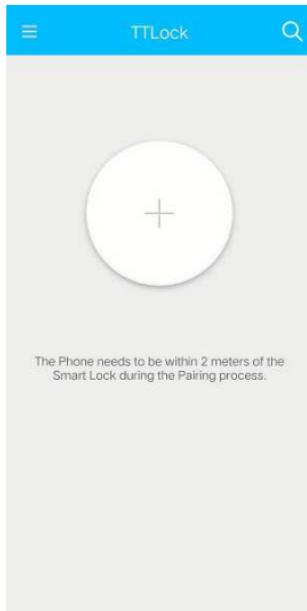

Click '+' in the center

Select 'Door Lock'

Touch keypad and click 'Next'

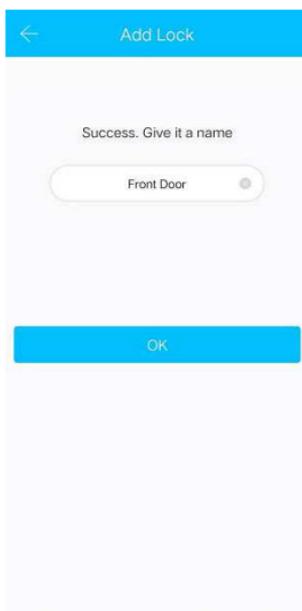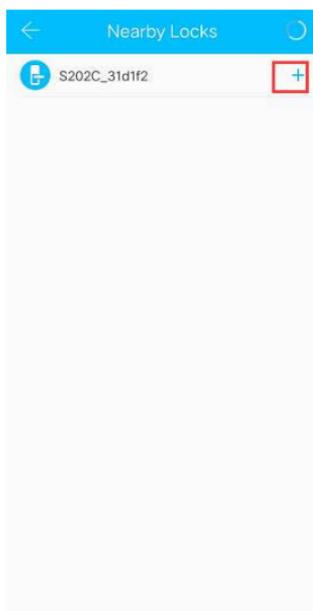


Click '+' with high-light device

Name your lock, and click 'OK'

Add completed

Remarks: Once there is no device or only has gray-label device on 'Nearby Locks' screen, please reset your smart lock and re-add it following steps below:




- ① Remove battery cover out
- ② Hold the reset button for 5 seconds

Part 2 Unlock/lock by APP via Bluetooth

☉ Unlock by touching the lock button, it will pop up ‘unlocked’


☉ Lock by long-pressing the lock button, it will pop up ‘locked’

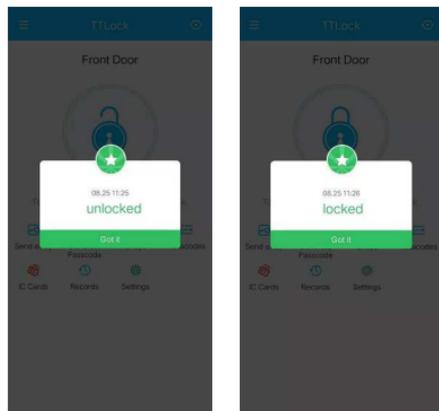

Remarks: Please check if your door lock operate in correct direction, once it reverse, please switch the toggle switch to other side and re-install it

Part 3 Auto-lock setting

Remarks: Auto-lock is setting up only by the program, but couldn't be used to determine if your door is locked. And please stay your phone close to your lock during setting process.

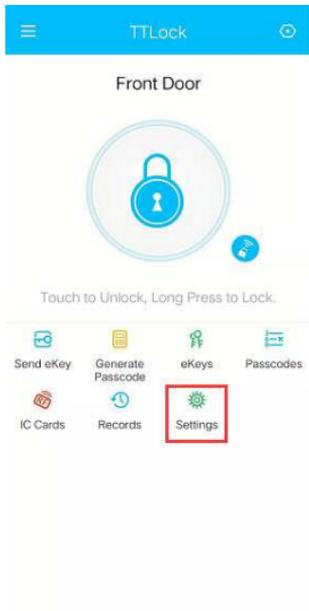


Click 'Settings'




Click 'Auto Lock'




Click 'Read The Time'

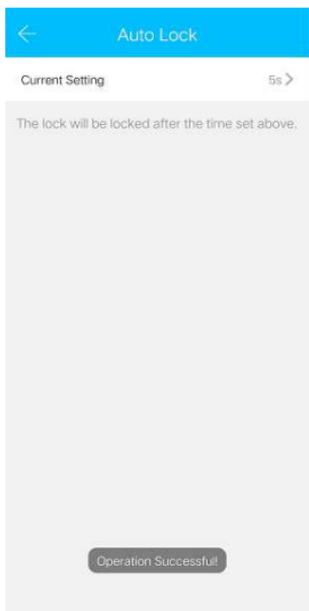


Click 'Current Setting'

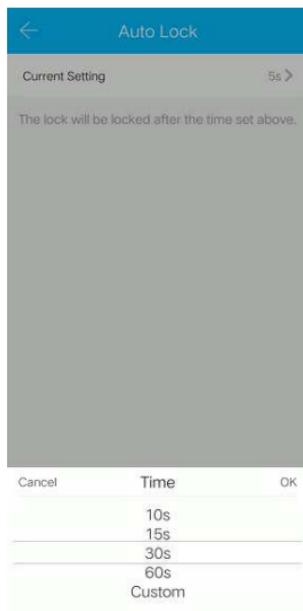

Select period you need to set

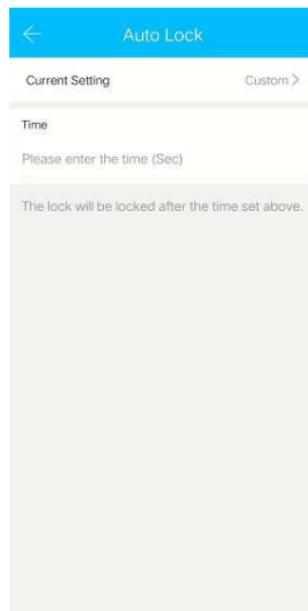

Or enter your time period

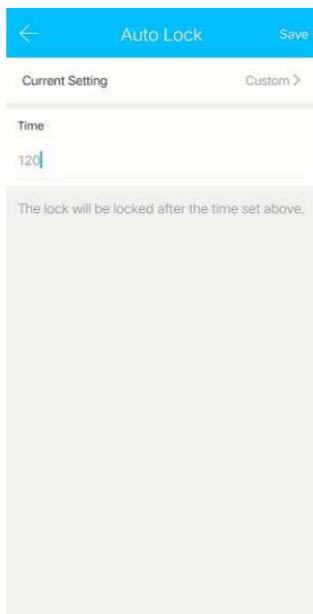

5-9005 be your choice





Set up completed

Part 4 Share APP operation to your family/guests(ekey)

ekey is a function for you to authorize the rights to your family members and guests to unlock/lock your door by the same APP. eKey can be authorized to MAX. 20 smart phone users.

© Download TTLock app and register a new account on new smart phone of family or guests.

© Click 'Send eKey' on the APP screen with admin account(The first account to add lock).

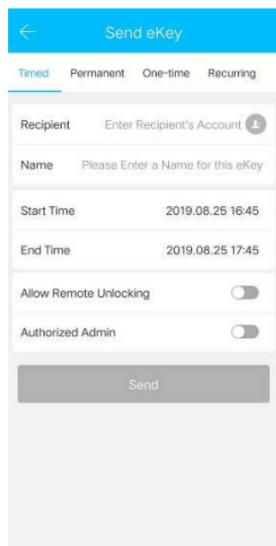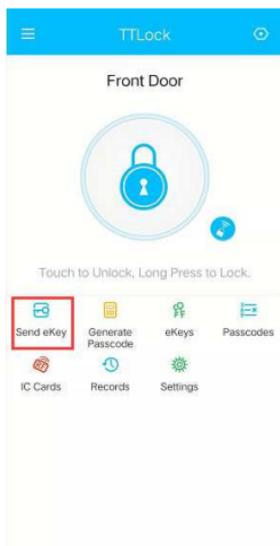

© Select Time, Permanent, One-time, Recurring eKey by yourself, then input Recipient account and name it.


© Select time period if necessary, then click 'send'.

© Refresh by pulling down on the APP screen with new smart phone APP, the smart lock will show up on the APP screen.


Remarks: Admin account can manage all guest accounts by clicking 'eKeys' on APP screen.

Part 5 Lock Sound

The original setting for this smart lock is Lock Sound On, but you can close it if you want.

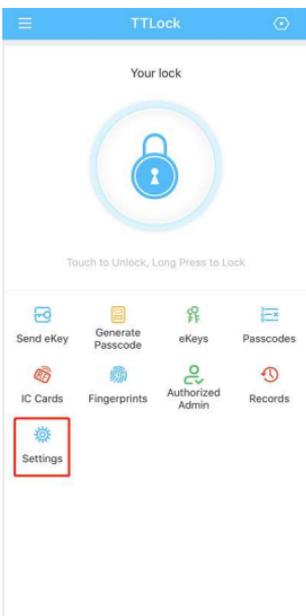

Click 'Settings'

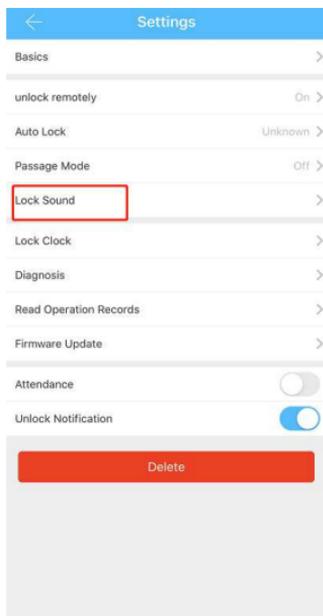

Click 'Lock Sound'



Click 'Turn Off'


Remark: Please stay your phone close to your lock during setting process.

Operation by keypad


Part 1 Generate Passcode



Click 'Generate Passcode' on APP

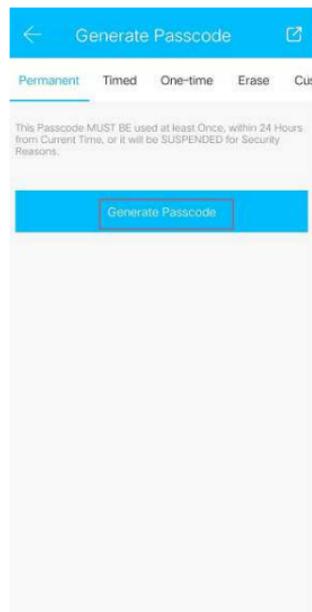

Select Passcode type

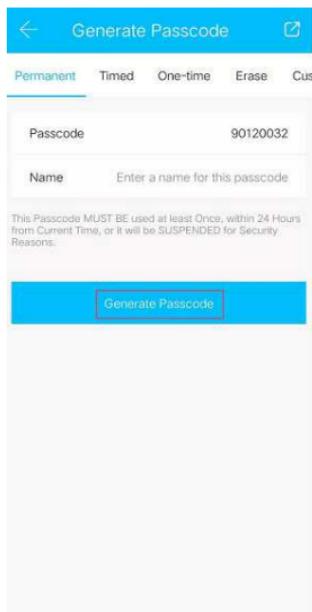

Passcode generated

Part 2 unlock/lock by keypad

① Unlock by inputting Passcode, then press unlock button

② Lock Only by long-pressing lock button


Remark: For security, this smart lock supports Virtual Passcode(Add any digit in front of or back of Passcode. e.g. Your Passcode is 12345678, you can unlock by 512345678 or 1234567802).

Part 3 Manage Passcode


Admin account can manage all Passcodes by clicking 'Passcodes' on APP.

Operation by IC cards


There are two IC cards included in the package, if you want more, please contact our service. IC Card can be used to unlock your door, but can not be used to lock your door.

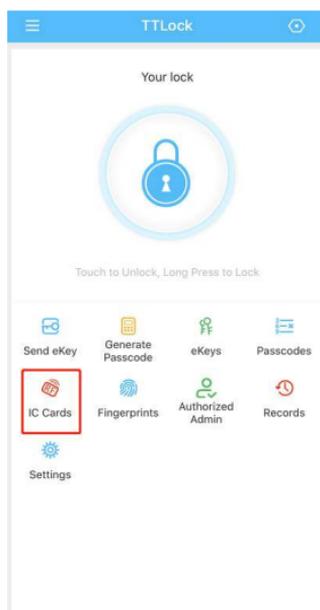

Click 'IC Cards' on APP



Click '⋮' upper right corner

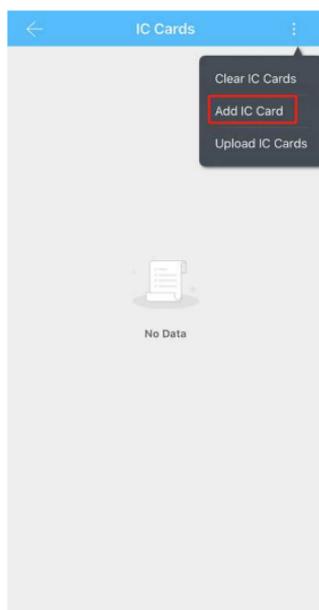

Click 'Add IC Card'

← Add IC Card

Name

Permanent

Start Time 2020-01-10 16:55

End Time 2020-01-10 16:55

Next

Name it and select time period



Waiting for connection



Connected




Place IC Card on the keypad , add completed

Remark: Please stay your phone close to your lock during setting process.


Operation by Fingerprint

Please make sure if your lock has fingerprint function before operation.

Fingerprint can be used to unlock your door, but can not be used to lock your door.

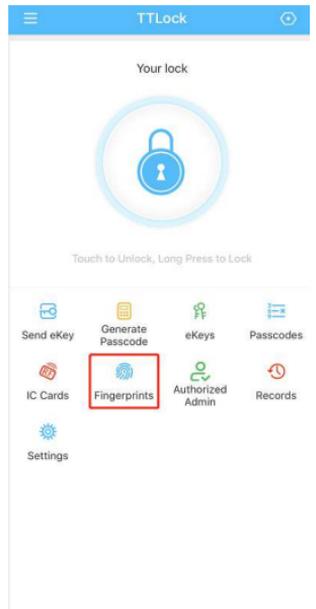


Click 'Fingerprint' on APP




Click ':' upper right corner



Click 'Add Fingerprint'

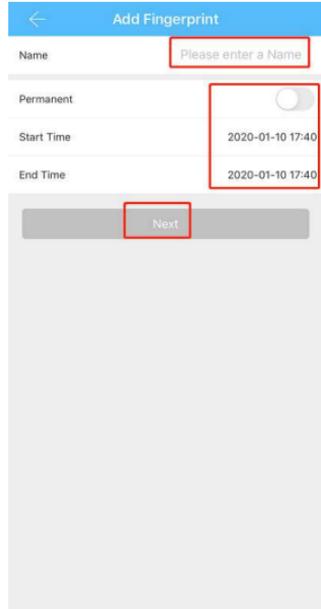

Name it and select time period

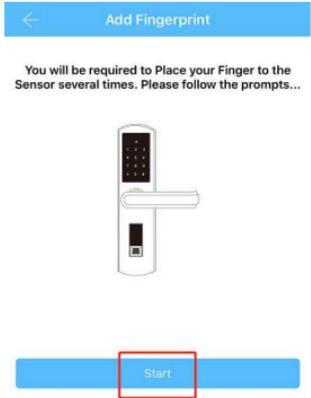

Click 'Start'



Place Finger 3 times

Fingerprint Recorded Successfully.

(3/3)



Follow the prompts... You will be required to Place and Remove your Finger from the Sensor 3 Times - Please be Patient.

Add completed



Remark: Please stay your phone close to your lock during setting process.

Operation by mechanical keys

There are two compatible mechanical keys included in the package, Please keep it easily for backup.

- ⊙ Press the keys cover, and turn it out
- ⊙ Insert the keys to unlock your door

Press the bottom side of the cover anti-clockwise rotate 120 degree



Operation by APP via wifi remotely

We provide Bluetooth wifi gateway(Sold separately) for this smart lock to reach for remote control via internet, you can search for Narpult smart wifi gateway to find it on www.amazon.com

Remark:About operation for wifi gateway, please refer to separate instructions of wifi gateway. But we have warm notice for you about unlock/lock remotely:

©Unlock by touching the little button

© Lock by long-pressing the same lock button with Bluetooth local control



More function


Part 1 Alarm

Anti-theft Alarm: Once this smart lock get four times wrong Passcodes, it will be locked for 5 minutes, nobody can get in even if you have correct Passcodes.


Low Voltage Alarm: Once the batteries close to be dead, this smart lock will sound a beep alarm, and if you forget to replace the batteries before to be dead, you can use Type-C backup power to power for it(Under the keys cover).

Part 2 Passage Mode


During the preset time period, this smart lock will remain unlocked until it is manually locked once Passage Mode activated

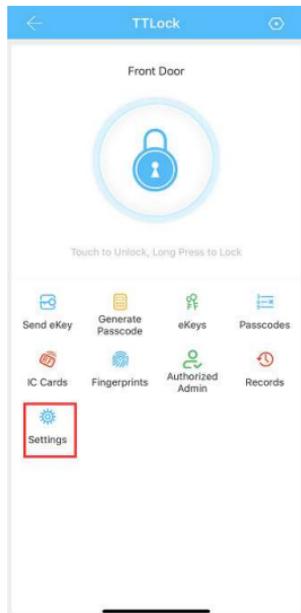


Click 'Settings'

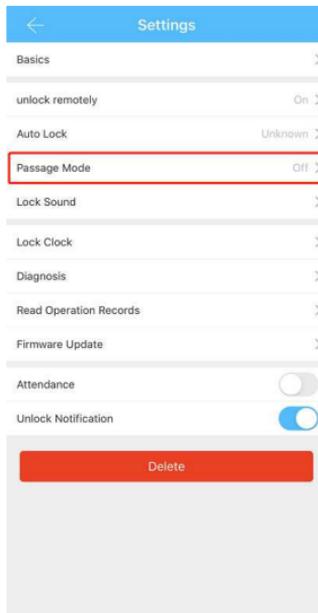

Click 'Passage Mode'

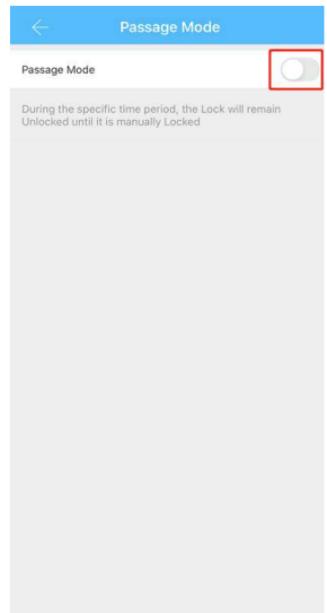

Activate Passage Mode

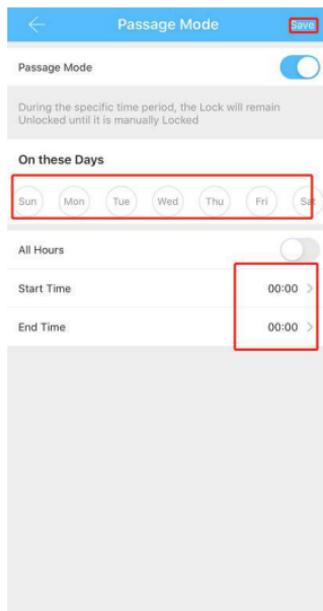

Select period and click 'Save'

Warranty

You will enjoy 100% satisfaction service with your smart lock. We provide 30days full refund and 60 days replacement with any product issue. E-mail to us with your order information, you will get more.

Powered by **Narpult Smart**

Customer Service:

service01@narpultsmart.com